



Z-LBB605XSP200

DAY/NIGHT BULLET IP CAMERA

Full HD
1080P

IP66 Rated

*Weatherproof
bullet camera*



FEATURES

- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor
- Hisilicon Processor (Hi3516C)
- H.264/H.264+/H.265/H.265+ Compression
- 4x Auto-focus & Zoom Lens
- 3 Megapixel HD Lens, HDR, Built-in POE
- Main Stream: 1080P@30fps With IR-Cut
- 42μ x 4PCS IR LED, IR range: 40M


Z-LBB605XSP200

DAY/NIGHT BULLET IP CAMERA




Model NO.	Z-LBB605XSP200
Camera	
Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Main processor	HISILICON Hi3516C
Resolution	2MP 1080P
Effective Pixels	1945(H)*1097(V)
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/25-1/10000Sec
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Lens	
Focus Length	2.7-13.5mm
Focus Control	Auto
Lens Type	Motorized
Pixels	3M Pixels
Night Vision	
Infrared LED	42μ X 4PCS
Infrared Distance	40M
IR Status	Auto Control
IR Power On	Auto Control
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP
ONVIF	Support ONVIF 2.4
P2P	YES, Support QR Code
POE	Support IEEE 802.3af
Main Stream 1	2048*1536@15fps
Main Stream 2	1920*1080@30fps
Main Stream 3	1280*720@30fps
Sub Stream 1	720*480@30fps
Tri Stream	352*288@30fps
IE Brower	IE8-11, Google Chrome, Firefox, Safari, Mac Safari
Smart Phone	iPhone, iPad, Android, Android Pad
Camera Features	
Day/Night	Color/ B&W (IR-CUT)
Image Config.	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, BLC, FLK(Flicker Control)
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	Support
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/NAS/CMS/Web
Language	English, Chinese Simplified, Chinese Traditional, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederland's
General	
Housing	IP66
Anti-cut Bracket	Optional
IR Cut Filter	YES
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 1000mA
Dimension	220(W) x 105(H) x 109(D)mm
Weight	1400g
Made in Taiwan	

The **STARVIS** is back-illuminated pixel technology used in CMOS image sensors for surveillance camera applications. It features a sensitivity of 2000 mV or more per 1 μm² (color product, when imaging with a 706 cd/m² light source, F5.6 in 1 s accumulation equivalent), and realizes high picture quality in the visible-light and near infrared light regions.

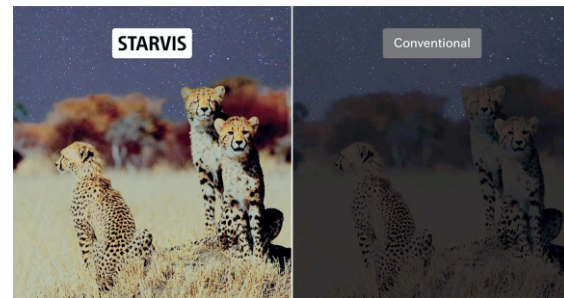

COMPARISON OF SENSITIVITY

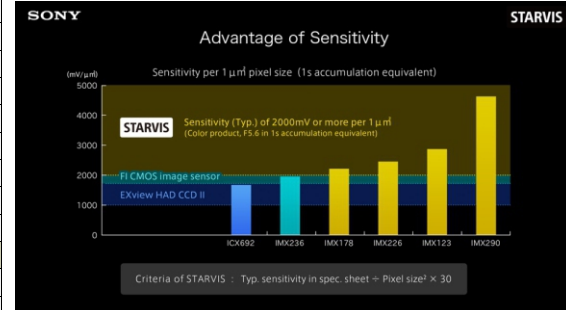

SUGGESTED APPLICATIONS



- Parking lots
- Public places
- Commercial
- Streets
- Government buildings
- Military
- many more...

©2013 Zebra Security, Inc. All rights reserved. All products and names mentioned are the property of their respective owners. While Zebra has made every effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, price system/component/ent/options availability are all subject to change without notice.

Zebra Security Inc. USA

Surveillance & IP video products, imaging systems division
120 Comostock Ave Station Island
New York 10314, USA
www.zebrasecurity.us

